


9FTGDX

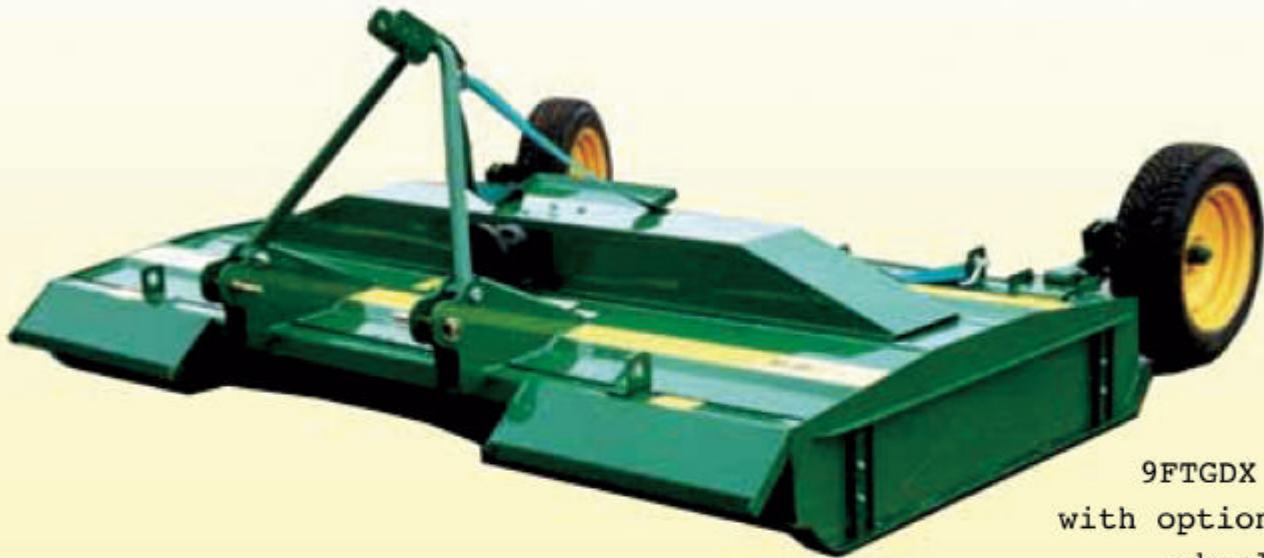

9FTGDX
with optional
wheel

The **MAJOR Centre Mount Topper** is a fully gear driven machine fitted with high speed rotors completed by twin cut swinging blades.

The contra-rotating swinging blades are timed ensuring a stripe free cut. Cutting height is easily adjusted by resetting the skids & castor wheels (optional) at the desired height.

Rubber couplings absorb transmissions shock between the gearboxes with the twin swinging blades taking the brunt of the shock loading as they mulch through the pasture land. The PTO Shaft is fitted with both shearbolt & overrunning clutch.



Twin cut swinging blades are fitted as standard offering finer cut & better

OUTSTANDING FEATURES:

- Heavy Duty shaft drive system and gearboxes.
- Rubber shock absorbers between gearboxes.
- Shear-bolt protection incorporated into the drive system.
- Drive line is totally enclosed by guards for added safety.
- Absence of belts and pulleys means low maintenance and no adjustments.
- Twin cut blades are synchronised at 90 degrees and overlap paths by 3", eliminating any uncut strips being left.
- Blade tips are allowed to swing in hardened bushings.
- Cutting range from 1/2" to 10".
- Comprehensive MAJOR guarantee.

Model	Overall Width	No. of Blades	Power Req.	Input PTO Speed	Blade Tip Speed	Cutting Range
9FTGDX	2740 9'	8	30-60Hp	540RPM	6631 m/min 21747ft/min	1/2" to 10" 12-250mm