


## SIDE MOUNT TOPPER

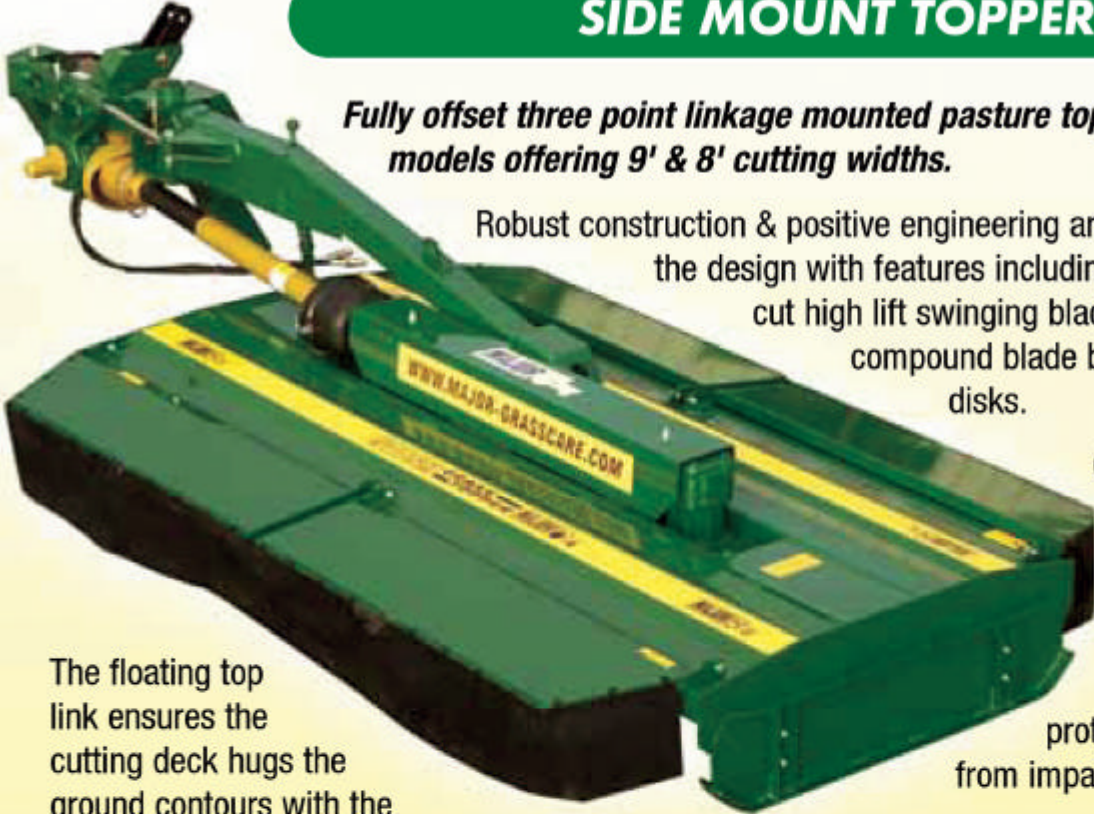

**Fully offset three point linkage mounted pasture topper with two models offering 9' & 8' cutting widths.**

Robust construction & positive engineering are used throughout the design with features including overlapping twin-cut high lift swinging blades retained in compound blade beams with undersole disks.

Other features include hydraulic offset with integrated hydraulic breakaway protecting the tractor from impact damage.

The floating top link ensures the cutting deck hugs the ground contours with the damper bar removing any lateral vibration Tractor PTO protection through shearbolt & overrun. Safety is paramount at MAJOR with CE conformity, full PTO Guarding & heavy duty rubber skirting preventing debris from escaping.

**FEATURES:**

- Fully offset machine.
- Independent cutting deck.
- Robust pivot points.
- Heavy duty transmission.
- Rubber shock absorbers between rotor gearboxes.
- Shear-bolt-Over run PTO protection.
- Full Hydraulic offset control.
- Hydraulic breakaway system.
- High Lift twin-cut swinging blades constructed from spring steel.
- 88mm (3 1/2") Blade overlap to eliminate striping.
- Hardened bushings on swinging blades.
- Undersole discs.
- Low Maintainance.
- Comprehensive MAJOR guarantee.



Hydraulic offset with integrated breakaway system  
 Floating Top Link allows machine to follow ground contours.  
 Large long life pivots.



Contra-rotating spring steel twin-cut swinging blades retained in hardened steel bushing & clamped by spring steel blade backs. Undersole discs to prevent scalping

Model	Width	PTO Input	No. of Blades	kW HP	Weight Kg	Blade Tip Speed	Cutting Range
800 SM	2440mm 8'	540	8	26-60 35-80	610	6002 m/min 19692 ft/min	12-250mm 1/2" - 10"
900 SM	2835mm 9' 3"	540	8	37-67 50-90	640	6630 m/min 21758 ft/min	12-250mm 1/2" - 10"